



با عرض ادب

شرکت گاز آب  افتخار دارد به استحضار برساند، با بیش از ۱۰ سال سابقه فعالیت در زمینه تولید اتصالات ابزار دقیق، منیفولد ها، شیر آلات ابزار دقیق و تولید اتصالات ایستگاههای CNG، با بکار گیری از ماشین آلات پیشرفته و سالن تست برای انجام کلیه تست های الزام آور استاندارد ها، آمادگی خود را جهت تولید کلیه اتصالات فشارقوی اعلام میدارد.

شایان ذکر است شرکت گاز آب  در زمینی به مساحت ۳۰۰۰ متر مربع در شهرک صنعتی عباس آباد و با در اختیار داشتن ۷۰ نیروی مجرب مشغول تولید انواع اتصالات استنلس استیل، برنجی و کربن استیل از سایز ۱/۱۶" تا ۲" می باشد. این شرکت در زمینه تولید قطعات خودرویی و داشتن تاییدیه سازه گستر و همچنین با داشتن ارتباط بازرگانی با تولید کنندگان اتصالات در دنیا توانایی تامین کلیه اتصالاتی که خود قادر به تولید آنها نیست را در کمترین زمان و بهترین قیمت با ضمانت خود دارا می باشد

بنا به هدف گذاری شرکت ، رضایت مشتریان در الویت کاری قرار دارد بدین منظور این شرکت در راستای بالا بردن رضایت مشتریان اقدام به اخذ گواهینامه مدیریت کیفیت ISO ۹۰۰۱-۲۰۰۰ نموده است و تمامی تولیدات خود را به مدت یک سال گارانتی تعویض بدون قید و شرط می نماید تا گامی هرچند کوچک در راستای رضایت بیشتر مشتریان بردارد.

مدیرعامل

کلیه تولیدات شرکت بر اساس استانداردها به شرح ذیل تست می گردد:

1. API Standard S98

2. BS 4368

3. ASTM F 1387

بر اساس استانداردهای فوق شیرآلات صد درصد تست با ضریب ۱/۱ تا ۱/۵ فشار کاری و اتصالات به صورت رندوم با هماهنگی مصرف کننده بر اساس توافق تست میگردد.



Thread Type

N = NPT

K = BSP Taper

R = BSPP

BR = BSPP

M = METRIC

RED = BSPP

انواع رزوه های قابل تولید بر اساس استانداردهای ذیل

ANSI B1.20.1

BS21 , ISO7/1

BS2779 , ISO 228/1+2 , DIN 3852 FORM A

BS2779 , ISO 228/1+2 , DIN 3852 FORM B

BS3643 , ISO 261 , 262 M = METRIC

BS2779 , ISO 228/1+2 , DIN 3852 with eolastic sealing

Tube (seamless)

**Material:**

stainless steel 316/316L ,304/304L
carbon steel A105

Size:

1/16" up to 1" (With different thicknesses)

Pressure Rating:

3000 psi up to 9000 psi

tube fittings

**Material:**

stainless steel 316/316L, 304/304L / brass
carbon steel A105

Size:

1/16 "up to 1"

Pressure Rating:

3000 psi up to 6000 psi

Tube to Male Pipe

Male Connector



Male Bulkhead Connector



Thermocouple Connector



Male Elbow



NPT Male 45° Elbow



NPT Male Run Tee



NPT Male Branch Tee

**Tube to Female Pipe**

Female Connector



Female Bulkhead Connector



Gauge Connector



Female Elbow



Female Run Tee



Female Branch Tee

**Tube to Tube Unions**

Union



Conversion Union



Reducing Union



Bulkhead Union



Dielectric Union Adapter, Dielectric Assembly



Union Elbow



Union Tee



Drop Size Tee



Union Cross

**Port Connectors**

Tube End Reducer



Tube End Bulkhead Adapter



Port Connector



Tube End Male Adapter



Tube End to SAE Straight Thread Adapter



Tube End Female Adapter



Push-Lok to Tube Adapter



Push-Lok to Male Adapter



Push-Lok to CPI™/A-LOK®



Push-Lok to Port Connector



Lapped Joint Tube Adapters



DP Transmitter Calibration Adapters

**37° Flare (AN) to CPI™/A-LOK®**

37° Flare (AN) to CPI™/A-LOK®



37° Flare Connector to CPI™/A-LOK®



37° Flare Bulkhead Connector to CPI™/A-LOK®

**Tube to O-Ring Seal**

Male Connector SAE Straight Thread



Male SAE Straight Thread Elbow




Male BSPP Straight Thread Elbow



Male Run Tee SAE Straight Thread




Male BSPP Run Tee Straight Thread



Male Branch Tee SAE
Straight Thread



Male BSPP Branch Tee
Straight Thread



Long Male Connector SAE
Straight Thread



45° Positionable Male
Elbow



Male Connector to O-Ring
Straight Thread



Male Connector to O-Ring
Pipe Thread



Tube End to O-Ring
Straight Thread



Tube End to O-Ring Pipe
Thread



Pipe Thread to SAE
Straight Thread Adapter



Bulkhead to Conversion
Adapter



Tube to Welded Systems

Socket Weld Elbow



Butt Weld Elbow



Socket Weld Connector



Butt Weld Connector



Analytical Fittings

Column End Fitting — Low
Internal Volume
with Frit



Column End Fitting — Low
Internal Volume



Column End Fitting — Low
Internal Volume
(without Frit)



Column End Fitting — with
Frit



Column End Fitting
(without Frit)



Union Connector — Low
Dead Volume



Male Connector — Low
Dead Volume



Sanitary Flange Fitting



Barbed Fittings

Barbed Connector to
Male Pipe



Barbed Connector to
Tube Adapter



Hose Connector Sleeve



Components

Insert



Tube Nut



Inverted Tube Nut



Knurled Nut



Ferrules



Front Ferrules



Back Ferrules



Ferrule Holder



Plug



Cap



Vent Protector



Sealing Washers
Bonded Seal and Copper



Bulkhead Locknut



Accessory Locknut





Pipe Fittings

Material:

stainless steel 316/316L, 304/304L
carbon steel A105

Size:

1/8" up to 2"

Pressure Rating:

3000 psi up to 9000 psi



ICN
Close Nipple



IRHB
Reducing Hex Bushing



IRSE
Reducing Street Elbow



IHN
Hex Nipple



IHC
Hex Coupling



IME
Male Elbow



IHLN
Hex Long Nipple



IHRC
Hex Reducing Coupling



IFT
Female Tee



IPG
ISO Parallel Gasket



IBT
Branch Tee



IHRN
Hex Reducing Nipple



IPP
Pipe Plug



IRT
Run Tee



IA
Adapter



IPC
Pipe Cap



IMT
Male Tee



IRA
Reducing Adapter



IFE
Female Elbow



IFC
Female Cross



ISE
Street Elbow

Needle valve & Manifold



Needle valve



Needle valve



Two valve manifold
(for gauge)



Needle valve
(multi port)

Materiyal:

stainless steel 316/316L,304/304L
carbon steel A105

Size:

1/8" up to 1"

Pressure Rating:

3000 psi up to 10000 psi



Three valve manifold
(for divert mounting)



Two valve manifold
(vertical port)



Three valve manifold
(for line remote...)



Five valve manifold
(for divert mounting)

Material:

stainless steel 316/316L, 304/304L
carbon steel A105

Size:

1/8" up to 3/4"

Pressure Rating:

3000 psi up to 6000 psi



Ball valve

Material:

stainless steel 316/316L, 304/304L
carbon steel A105

Size:

1/8" up to 2"

Pressure Rating:

1000 psi up to 10000 psi



Materiyal:

stainless steel 316/316L,304/304L
carbon steel A105

Size:

1/8 " up to 2"

Pressure Rating:

1000 psi up to 10000 psi

Block&bleed valve



Materiyal:

stainless steel 316/316L,304/304L
carbon steel A105

Size:

1/8 " up to 2"

Pressure Rating:

3000 psi up to 10000 psi

Check valve

**Material:**

stainless steel 316/316L ,304/304L
carbon steel A105

Size:

1/8 " up to 3/4"

Pressure Rating:

30 kpa up to 800 kpa

Quick action

**Materiyal:**

stainless steel 316/316L,304/304L
carbon steel A105

Size:

1/8" up to 2"

Pressure Rating:

3000 psi up to 6000 psi



Materiyal:

stainless steel 316/316L,304/304L
carbon steel A105

Size:

1/8" up to 2"

Pressure Rating:

3000 psi up to 6000 psi

37° Flare Tube Fittings

**Materiyal:**


stainless steel 316/316L,304/304L
carbon steel A105

Size:

1/8 " up to 2"

Pressure Rating:

3000 psi up to 6000 psi

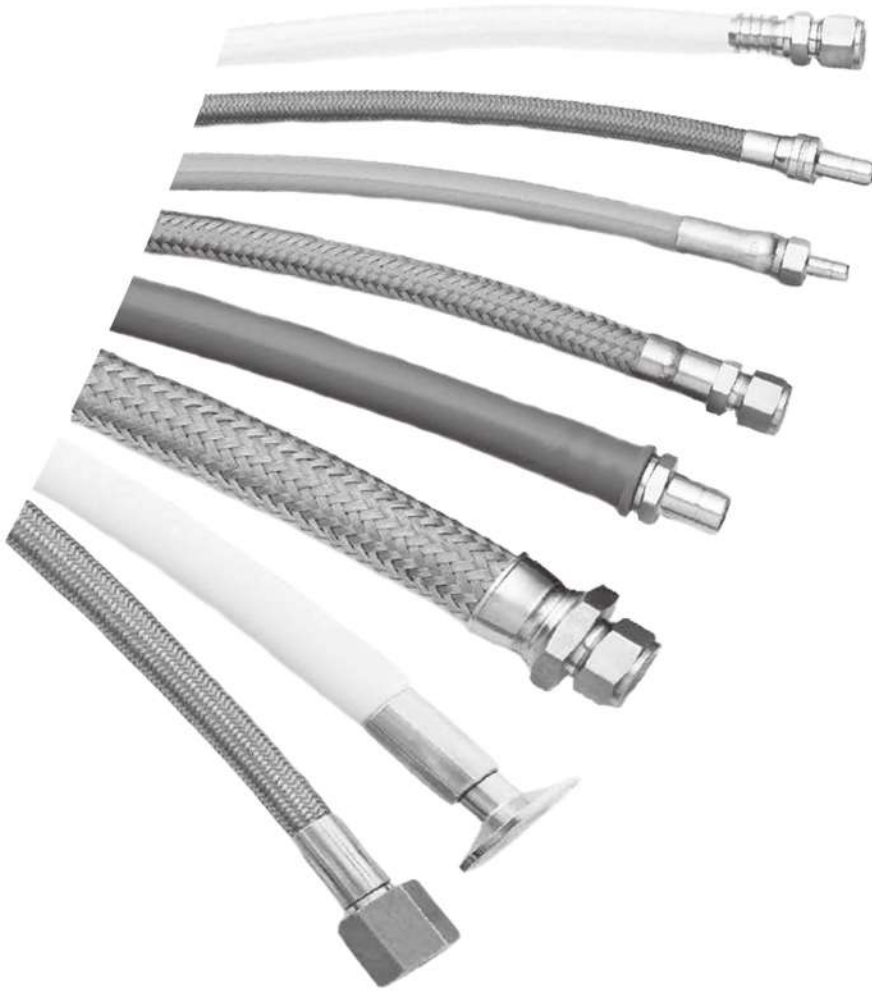**Materiyal:**

stainless steel 316/316L,304/304L
carbon steel A105

Size:

1/8 " up to 2"

Pressure Rating:

3000 psi up to 6000 psi



آدرس دفتر مرکزی: تهران - خیابان مظهری - مفتاح شمالی - کوچه بخشی موثر - پلاک ۲۸ **A**

تهران - شهرک صنعتی عباس آباد - گازاب شیر **A**

۰۲۱۸۸۸۶۰۶۷۵-۶ **P**

۰۲۱۸۸۸۴۷۶۱۷ **F**

www.GAZAB.ir **W**